



ARMOUR PREMIUM DUCT FILM

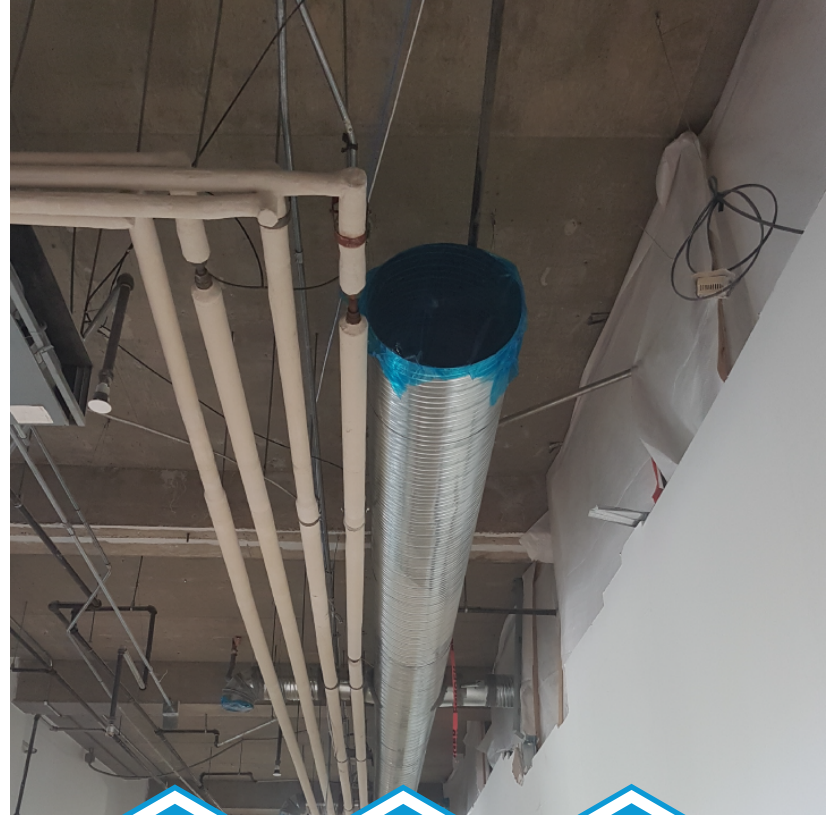

CONTRIBUTES TO
LEED CREDITS

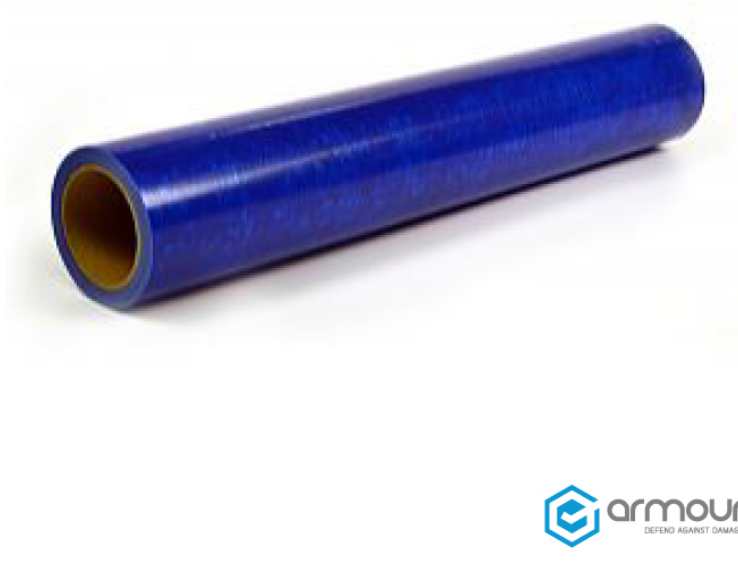

ARMOUR SPILL
PROTECTION



CLEAN REMOVAL

Armour Premium Duct Film can be used to protect uninstalled and partially installed ductwork from contaminants such as dust and dirt. This product is tried and tested by many leading HVAC and sheet metal manufacturing organizations ensuring the highest level of quality and tear resistance.

ITEM CODE	SIZE	WEIGHT	PACKAGED
APDF24200	24in X 200ft (400 sq.ft.)	4.08lb	6 / box 72 / skid
APDF36200	36in X 200ft (600 sq.ft.)	8.65lb	6 / box 72 / skid
APDF48200	48in X 200ft (800 sq.ft.)	11.51lb	6 / box 72 / skid

ARMOUR PREMIUM DUCT FILM

<u>Physical Properties</u>	<u>Details</u>
Product Material	Polyethylene (PE) Film
Adhesive Type	Water Based Acrylic Solvent
Product Colour	Blue
Shelf Life	12 months
Packaging Size	6 rolls per carton
HS Code	3919.90.00.20

<u>Specification Properties</u>	<u>Metric</u>	<u>Standard/Imperial</u>
Application Temperature Range	-15 35°C ±10%	5 95°F ±10%
Operating Temperature Range	-10 35°C ±10%	14 95°F ±10%
Product Thickness	0.047 mm	1.85 mil
Adhesive Thickness	0.015 mm	0.59 mil
TOTAL Product Thickness	0.062 mm	2.44 mil
Product Width	Varies	Varies
Product Height/Length	Varies	Varies
Tensile Strength	2.657 kgf/25mm	5.85 lbs/in
Adhesion Strength	0.2 kgf/25mm	0.44 lbs/in
Unwinding Force	0.05 kgf/25mm	0.11 lbs/in
Elongation at Break		> 300 %