


# ARMOUR PREMIUM DUCT FILM



CONTRIBUTES TO  
LEED CREDITS

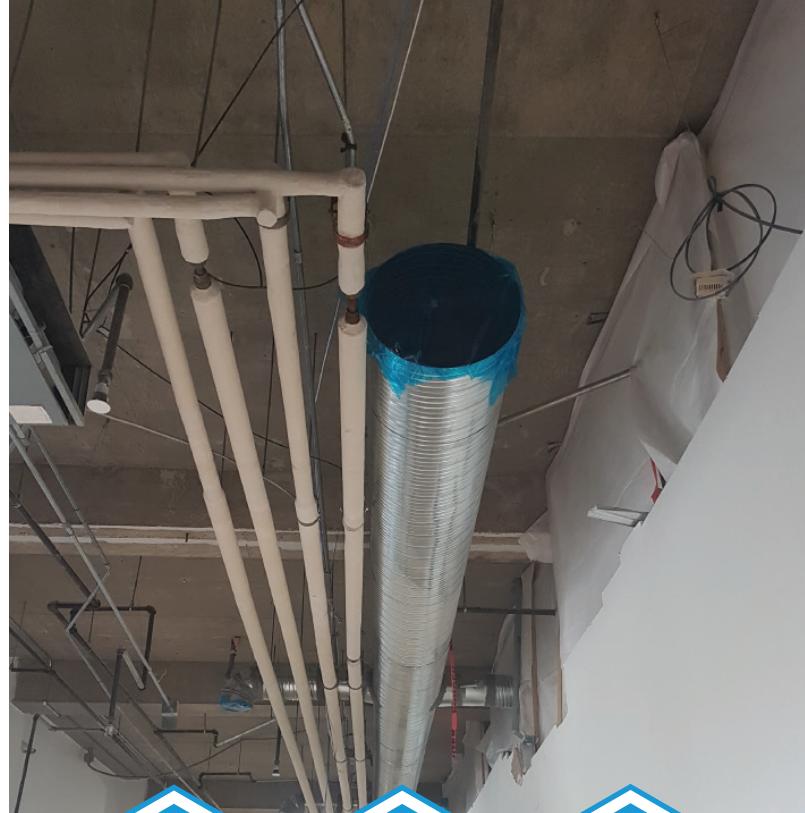

ARMOUR SPILL  
PROTECTION



CLEAN REMOVAL

Armour Premium Duct Film provides reliable protection for uninstalled or partially installed ductwork, helping to maintain system cleanliness and integrity during construction or storage.

- Made from durable film with strong tear resistance
- Shields duct interiors from dust, dirt, and other contaminants
- Trusted and tested by leading HVAC and sheet metal manufacturing organizations for quality assurance
- Commonly used to protect open ductwork from minor construction damage like scuffs, scratches, or dust in low-traffic or short-term projects

ITEM CODE	SIZE	WEIGHT	PACKAGED
APDF24200	24in X 200ft(400 sq.ft.)	4.08lb	6 / box 72 / skid
APDF36200	36in X 200ft(600 sq.ft.)	8.65lb	6 / box 72 / skid
APDF48200	48in X 200ft(800 sq.ft.)	11.51lb	6 / box 72 / skid

# ARMOUR PREMIUM DUCT FILM

<u>Physical Properties</u>	<u>Details</u>
Product Material	Polyethylene (PE) Film
Adhesive Type	Water Based Acrylic Solvent
Product Colour	Blue
Shelf Life	12 months
Packaging Size	6 rolls per carton
HS Code	3919.90.00.20

<u>Specification Properties</u>	<u>Metric</u>	<u>Standard/Imperial</u>
Application Temperature Range	-15    35°C ±10%	5    95°F ±10%
Operating Temperature Range	-10    35°C ±10%	14    95°F ±10%
Product Thickness	0.047 mm	1.85 mil
Adhesive Thickness	0.015 mm	0.59 mil
TOTAL Product Thickness	0.062 mm	2.44 mil
Product Width	Varies	Varies
Product Height/Length	Varies	Varies
Tensile Strength	2.657 Kgf/25mm	5.85 lbs/in
Adhesion Strength	0.2 Kgf/25mm	0.44 lbs/in
Unwinding Force	0.05 Kgf/25mm	0.11 lbs/in
Elongation at Break		>300 %