


ARMOUR PRO-CLEAN TAPE



Armour Pro-Clean Tape offers up to 180 day clean removal* when used on interior surfaces, and up to 60 day clean removal* for exterior applications, making it an excellent choice for using on delicate surfaces. This unique solution is waterproof, easy to tear by hand, and commonly used to hold temporary surface protection materials in place as an edge tape directly applied to the finish that you are protecting.

| ITEM CODE | SIZE | WEIGHT | PACKAGED |
|-----------|-------------|--------|----------|
| APCT2164 | 2in X 164ft | 0.6lb | 30 / box |
| APCT3164 | 3in X 164ft | 1.2lb | 18 / box |

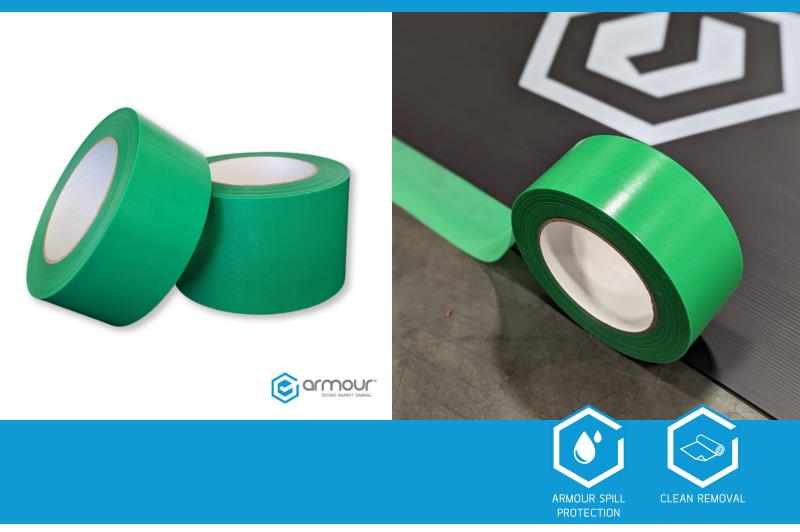



ARMOUR PRO-CLEAN TAPE

| Physical Properties | <u>Details</u> | |
|---------------------|--|--|
| Product Material | Polyethylene (PE) Tape | |
| Adhesive Type | Acrylic | |
| Colour | Green | |
| Shelf Life | 12 Months when dry | |
| Clean Removal* | 180 Days | |
| UV Rating | 30 Days | |
| PacKaging Size | 2 in 24 rolls per case 3 in 16 rolls per case | |

| Specification Properties | <u>Metric</u> | <u>Standard/Imperial</u> |
|-------------------------------|---------------|--------------------------|
| Application Temperature Range | +7 49°C ±10% | 45 120°F ±10% |
| Operating Temperature Range | -7 93°C ±10% | 20 200°F ±10% |
| Product Thickness | 0.13 mm | 5.12 mil |
| Product Width | 50 mm & 75 mm | 2 in & 3 in |
| Product Length | 50 m | 164 ft |
| Tensile Strength | 3.85 kgf/10mm | 21.23 lbs/in |
| Adhesion Strength | 0.17 kgf/10mm | 0.95 lbs/in |
| Elongation at Break | | 37 % |

*Certain additives in the product adhesive and/or material finishes of the surface it is applied to may soften the products adhesive over time, potentially leaving adhesive residue. There is no guarantee that adhesive products will not remove existing finishes when removed, due to the quality of bond on existing paint, wax, or other coatings that the adhesive product is applied to. Given the diversity of factors that can affect the use and performance of any Product, you, as the user, are solely responsible for evaluating the Product and determining whether it is fit for the intended purpose and suitable for your method of application.

